

ACT NOW !



EP Prop C+D35

Take advantage of our **galvanized steel post shore** designed for shoring and reshoring of slab formwork



Contact us today for more details at info@ulmaconstruction.ca

When you buy from **ULMA**, you are buying **quality** products for years to come with **exceptional service** from a global industry leader.

\$100 each


USED EQUIPMENT IN GOOD CONDITION

EP C+D35

USAGE LENGTH (min. - max.)	6' 7" - 11' 6"
STATIC COMPRESSION (max. - min.)	Shoring conditions: 8.5 kips Repropping conditions: 10.3 kips

BENEFITS

- **Guaranteed high safety levels:**
 - Designed in accordance to the standard EN 1065. Certification marking is incorporated in the handle (*).
 - Simple and quick adjustment of the collar nut.
 - Inner tube, clevis pin and collar nut with unintentional disengagement system.
- **Cost-effective** due to an optimized design.

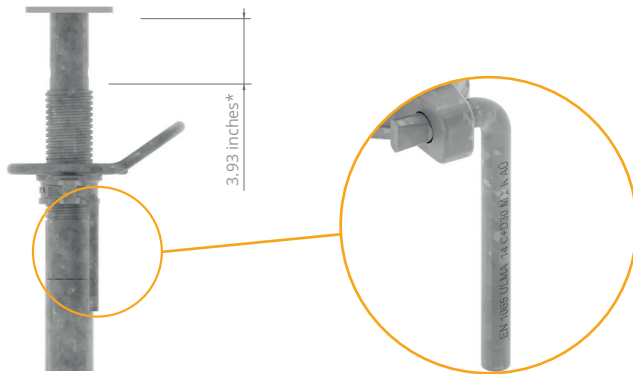

FAST DELIVERY



EP post shores ready for shipping

- **Ideal for repropping.**
- System for **fast post shore stripping** included in the clevis pin.
- Collar nut with projection for simplified adjustment of the post shore.
- **High durability for multiple reuse**, thanks to the hot-dip galvanization that provides excellent protection against corrosion.
- Simple and quick maintenance. The collar nut has a thread designed to remove dirt and concrete remains.
- Compatible with various ULMA shoring systems: ENKOFLEX, CC-4, VR TABLES...



EP prop under MK tables shoring conditions



EP prop under repropping conditions